



PROJECT	TYPE
CATALOG NUMBER	

PRODUCT DESCRIPTION

Architectural Driverless LED Linear Lightbar is a 9", 18", 24" or 36", rigid and unobtrusive (only 1, 3/16" thickness) dimmable LED Lightbar that utilizes a dense array of strategically placed LEDs. Bars can be interconnected in series from one 120VAC power feed. Only 3.5w for the 9", 6.8W for 18", 9W for 24", 12.4W for 36", and 16.7W for 48", 50,000 hour LED life. Each bar has an integral rocker switch. Designed for cove lighting, as well as commercial and architectural applications. Frosted lens assures an even glow over the length of the fixture with virtually no visible diode imaging.

KEY FEATURES

- Unique design - extruded aluminum vessel with frosted polycarbonate lensing
- On/off rocker switch
- Mounts via mounting clips (included)
- Rigid and flexible connectors available (see below)
- Dimmable
- Max. run is 50 feet

ELECTRICAL

- 120VAC - Needs no driver
- Rated at 4.2W per foot
- Dimmable with standard Triac Dimmer
- Rated life: 50,000 hrs.

OPTICS


- 2700K, 3000K, 4000K
- Up to 1230 lumens per bar • 80+ / 90+ CRI

CERTIFICATION

- CSA
- Energy Star

WARRANTY

- 5 year warranty

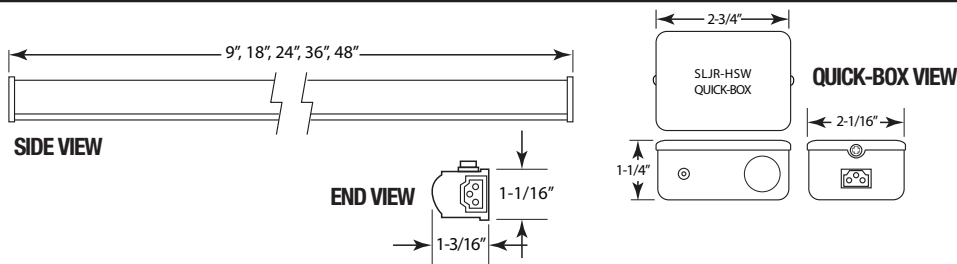

FIXTURE ORDERING INFORMATION

Catalog No.	Length	Wattage	Lumens	CRI	Kelvin Temp.*	Finish
SLCB-9-27	9"	3.5W/bar	280/bar	94+	2700K	White
SLCB-18-27	18"	6.8W/bar	530/bar	94+	2700K	White
SLCB-24-27	24"	9W/bar	685/bar	94+	2700K	White
SLCB-36-27	36"	12.4W/bar	930/bar	94+	2700K	White
SLCB-48-27	48"	16.7W/bar	1230/bar	94+	2700K	White
SLCB-9-30	9"	3.5W/bar	280/bar	94+	3000K	White
SLCB-18-30	18"	6.8W/bar	530/bar	94+	3000K	White
SLCB-24-30	24"	9W/bar	685/bar	94+	3000K	White
SLCB-36-30	36"	12.4W/bar	930/bar	94+	3000K	White
SLCB-48-30	48"	16.7W/bar	1230/bar	94+	3000K	White
SLCB-9-40	9"	3.5W/bar	280/bar	94+	4000K	White
SLCB-18-40	18"	6.8W/bar	530/bar	94+	4000K	White
SLCB-24-40	24"	9W/bar	685/bar	94+	4000K	White
SLCB-36-40	36"	12.4W/bar	930/bar	94+	4000K	White
SLCB-48-40	48"	16.7W/bar	1230/bar	94+	4000K	White

ACCESSORY ORDERING INFORMATION

Cat. No.	Description
SLD-1	Lightbar to lightbar connector
SLD-C6	6' cord and plug
SLJ-6	6" flexible lightbar to lightbar connector
SLJ-12	12" flexible lightbar to lightbar connector
SLJ-24	24" flexible lightbar to lightbar connector
SLJ-36	36" flexible lightbar to lightbar connector
SLJR-HSW	Junction box for hardware
SLD-HW-72	Lightbar to power lead whip 72"

Includes (2) mounting clips and (2) screws for surface mounting, (2) mounting clips and (2) screws for 45° mounting, and (1) SLD-1 lightbar to lightbar connector. Fixture must be used with SLD-1 or SLJ connectors. All accessories sold separately

* Kelvin temperature (color) ±200K