

PROJECT	TYPE
CATALOG NUMBER	

KEY FEATURES

- Rigid low profile platform
- Dry location - no shielding of diodes
- Padded 3M mounting tape affixed at back
- Flexible lightbar to lightbar and lightbar to power supply connectors available (see below)
- Class 2
- Dimmable. For a complete list of applicable dimmers, please consult product page on website

ELECTRICAL

- 12VDC • Remote power supply required
- Each LED is 0.16W = 3.04W per foot
- 8": 0.14A, 16": 0.28A
- Rated life: 50,000 hrs.

OPTICS

- 3500K
- Up to 264 lumens per bar

CERTIFICATION

- ETL

WARRANTY


- 5 year warranty

12 VOLT **CLASS 2**

DRY LOCATION **80+ CRI** **5 Yr. WARRANTY**

PRODUCT DESCRIPTION

LTB series LED Linear LightBar is a 7-3/4" or 15-1/4" rigid and unobtrusive Dimmable High Output LED LightBar that can be interconnected in series from one low voltage DC power source. Only 0.14 amps per 7-3/4" (12 LEDs) and 0.28 amps per 15-1/4" (24 LEDs). 50,000 hour lamp life.

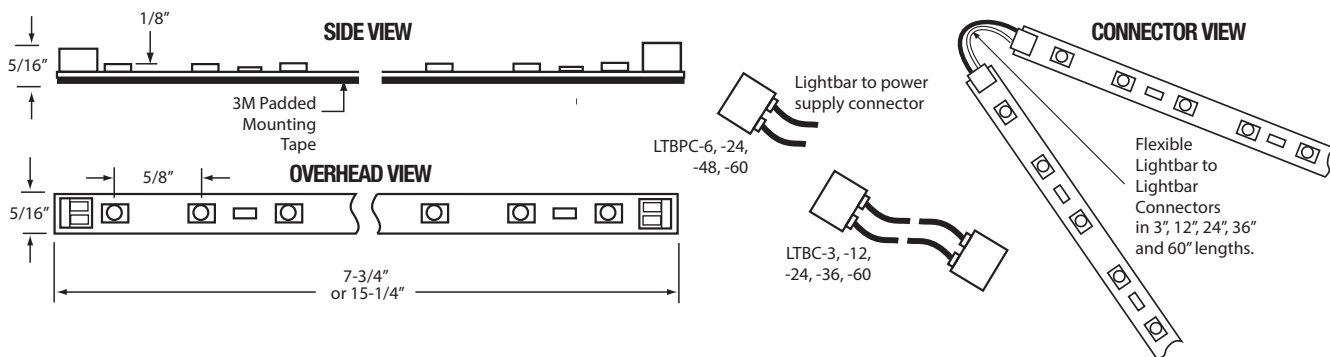

FIXTURE ORDERING INFORMATION

Catalog No.	Length	Wattage / Bar	Color*	CRI	Lumens / Bar	LED Life
LTB-8	7-3/4"	1.68W	3500K	80+	132	50,000 Hrs.
LTB-16	15-1/4"	3.36W	3500K	80+	264	50,000 Hrs.

POWER SUPPLIES

- Please see our website at gmlighting.net

PHOTOMETRICS

- Please see our website at gmlighting.net

CONNECTORS AND ACCESSORIES

Catalog No.	Length
LTBC-3	3" Flexible lightbar to lightbar connector
LTBC-12	12" Flexible lightbar to lightbar connector
LTBC-24	24" Flexible lightbar to lightbar connector
LTBC-36	36" Flexible lightbar to lightbar connector
LTBC-60	60" Flexible lightbar to lightbar connector
LTBPC-6	6" Flexible lightbar to power supply connector

Catalog No.	Length
LTBPC-24	24" Flexible lightbar to power supply connector
LTBPC-48	48" Flexible lightbar to power supply connector
LTBPC-60	60" Flexible lightbar to power supply connector
LTMC	Mounting clips
GMSB-W	Splice box - white - 2"L x 1"W x 5/8"D
GMSB-B	Splice box - black - 2"L x 1"W x 5/8"D

* Kelvin temperature (color) ±200K