

**LED ELECTRONIC  
320W POWER SUPPLY**  
by  
**GM Lighting**

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

Universal AC input / full range electronic power supply that features short circuit, overload, and over voltage protection. 12VDC output. 88 - 264 VAC input. 47 - 63Hz frequency range at 79% typical efficiency. 25 Amps. 320 Watts. Fan cooled.


**PRODUCT SPECIFICATIONS**

**Construction:** Construction: Sturdy ventilated full metal enclosure for maximum circuit board cooling. No external fusing required. LED indicator for power on. High operating temperature up to 70°C (158°F). Screw terminals.

**Electrical:** Output voltage 12VDC. 110 - 180% rated output power overload protection. Overload recovers automatically after fault condition is removed. Withstands 300VAC surge input for 5 seconds. Utilizes 105°C (221°F) long life electrolytic capacitors.

**Label:** ETL listed.

Not rated for outdoor use.

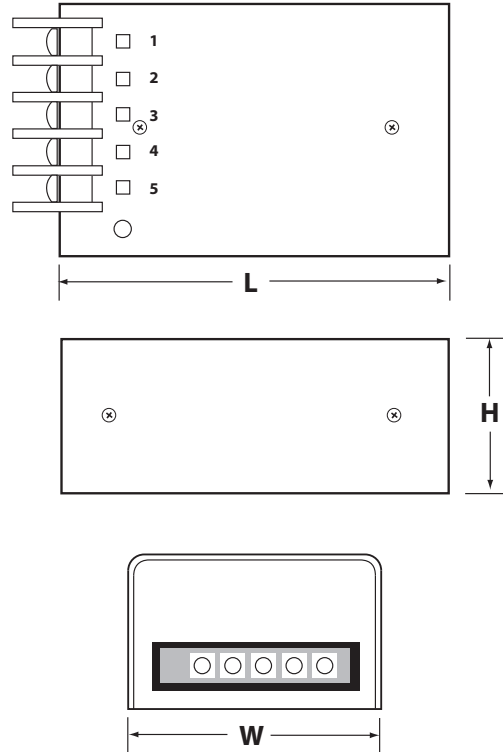

Catalog Number	Max. Wattage	Input Voltage	Output Voltage	Dimensions		
				L	W	H
LTH-25	320W	120V	12 VDC	9"	4.5"	2"

NOTE: For 12V Voltage Drop - Please see our website.



GM Lighting, LLC • 9830 W. 190th St. • Unit F • Mokena, IL 60448  
Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • www.gmlighting.net  
e-mail: gmlightingllc@sbcglobal.net • Specifications subject to change without notice. LTH25\_103013

