



8165 E Kaiser Blvd. Anaheim, CA 92808
 p. 714.282.2270
 f. 714.676.5558

Report No: L041609202

Date: 5/3/2016



NVLAP LAB CODE 200927-0

Report No: L041609202

Report Prepared For: GM LIGHTING
 9830 W 190th St, Torrance, CA 90503

Model Number: LTR30024-90-30

Test: Electrical and Photometric tests

Standards Used: Appropriate part or all test guidelines were used for test performed:
IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products
ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products
ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Catalog number is LTR30024-90-30. Received in working and undamaged condition. No modifications were necessary.

Testing Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 5/2/16

Date of Tests: 5/2/16 - 5/3/16

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S1	11/18/16
Xitron Power Analyzer	2503AH	MT-EL01	11/30/16
ITECH DC Power Supply	IT6122	PSDC-03-S1	11/17/16
Fluke Digital Thermometer	52k/J	MT-TP02-GC	11/24/16
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

Test Summary

Manufacturer:	GM LIGHTING
Model Number:	LTR30024-90-30
Driver Model Number:	N/A
Total Lumens:	1613.96
Input Voltage (VDC):	24.00
Input Current (Amp):	0.82
Input Power (W):	19.84
Input Power Factor:	1.00
Current ATHD @ 120V(%):	N/A
Current ATHD @ 277V(%):	N/A
Efficacy:	81
Color Rendering Index (CRI):	91
Correlated Color Temperature (K):	3018
Chromaticity Coordinate x:	0.4343
Chromaticity Coordinate y:	0.4007
Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:45
Total Operating Time (Hours):	1:15
Off State Power(W):	0.00


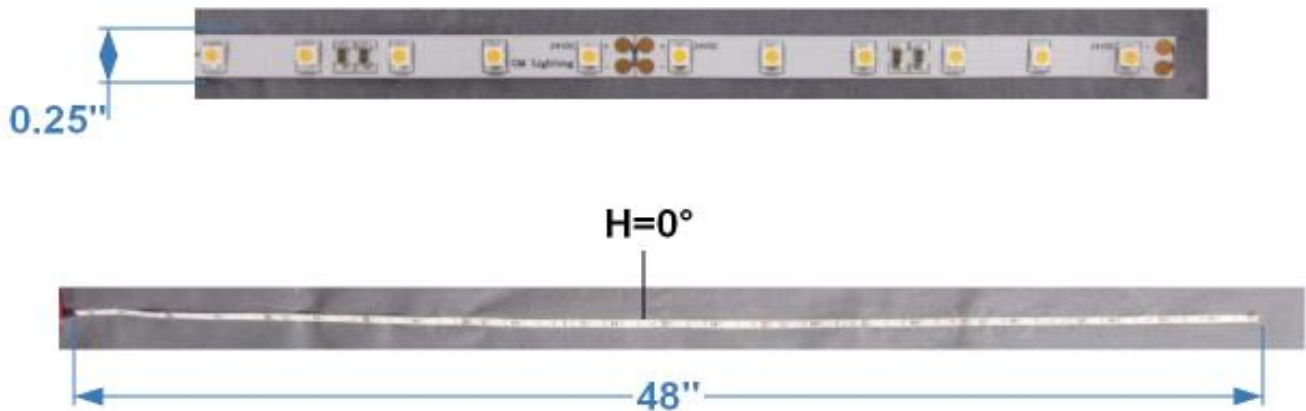


FIG. 1 LUMINAIRE

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

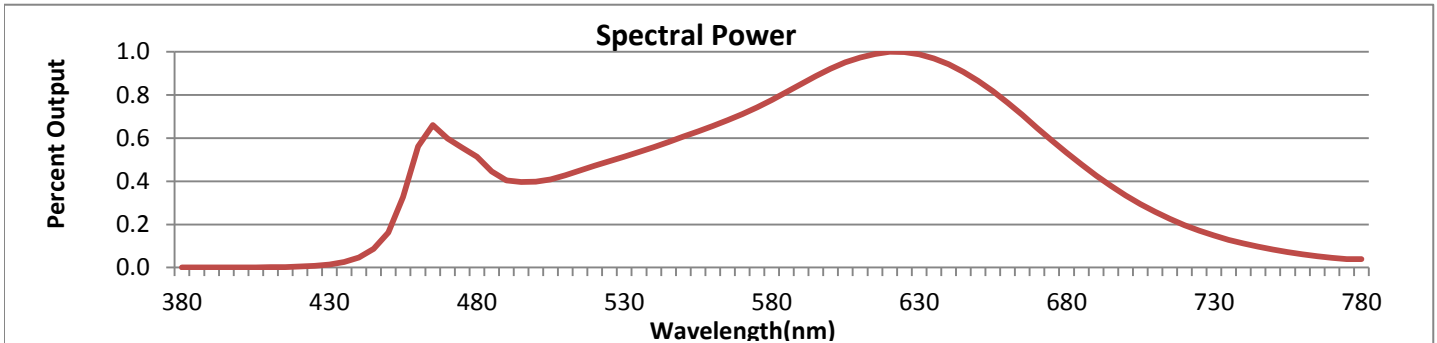


Wavelength	W/m ² nm	440	0.0011	510	0.0101	580	0.0183	650	0.0204	720	0.0047
380	0.0000	450	0.0038	520	0.0111	590	0.0201	660	0.0180	730	0.0035
390	0.0000	460	0.0133	530	0.0121	600	0.0218	670	0.0153	740	0.0026
400	0.0000	470	0.0141	540	0.0132	610	0.0230	680	0.0126	750	0.0020
410	0.0000	480	0.0121	550	0.0143	620	0.0236	690	0.0101	760	0.0015
420	0.0001	490	0.0095	560	0.0155	630	0.0233	700	0.0079	770	0.0011
430	0.0003	500	0.0094	570	0.0168	640	0.0223	710	0.0061	780	0.0009

CRI & CCT

x	0.4343
y	0.4007
u'	0.2503
v'	0.5197
CRI	90.80
CCT	3018
Duv	-0.00099

R Values

R1	97.42
R2	95.28
R3	90.64
R4	88.55
R5	94.45
R6	90.80
R7	86.14
R8	83.06
R9	72.56
R10	91.27
R11	90.91
R12	76.93
R13	98.75
R14	95.75

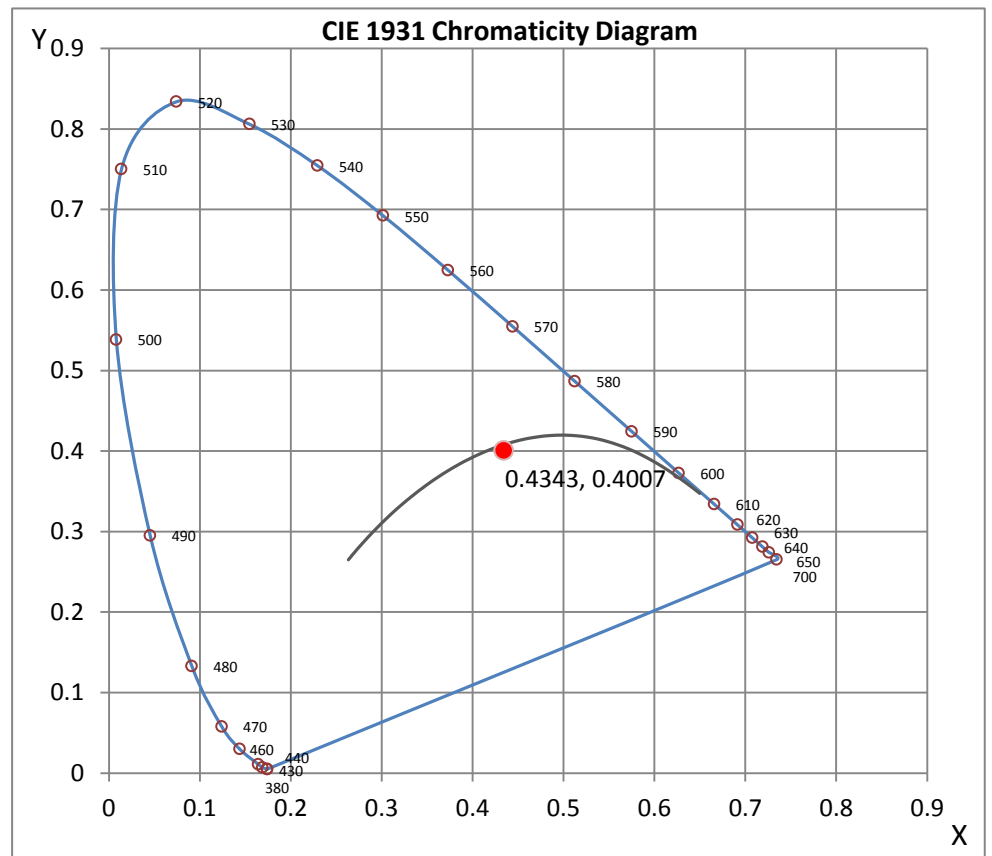

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Released by:



Jeff Ahn
Engineering Manager

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 9*



8165 E. Kaiser Blvd. Anaheim, CA 92808
 p. 714.282.2270
 f. 714.676.5558

Photometric Test Report

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L041609202.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L041609202
 [TESTLAB] LIGHT LABORATORY, INC.
 [ISSUEDATE] 5/3/2016
 [MANUFAC] GM LIGHTING
 [LUMCAT] LTR30024-90-30
 [LUMINAIRE] 4 FT HO Flexible LED Linear Ribbon
 [LAMPPOSITION] 0,0
 [LAMPCAT] N/A
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
 [POWER SUPPLY] 24VDC CONSTANT VOLTAGE SOURCE
 [INPUT] 24VDC, 19.84W
 [TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1614
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	81
Total Luminaire Watts	19.84
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.01 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	143235	143535	143809
55	139298	139650	140006
65	130231	130607	130925
75	109722	111467	110512
85	72212	72736	71163

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L041609202.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0	551.33	551.33	551.33	551.33	551.33
5	548.81	548.77	549.27	549.23	549.57
10	542.35	541.89	542.22	542.35	542.94
15	531.19	531.02	531.07	531.61	531.86
20	515.92	515.79	516.05	516.38	516.68
25	495.62	495.99	496.66	496.66	496.71
30	472.46	471.70	472.29	472.54	473.63
35	444.69	444.64	444.48	445.23	446.03
40	412.13	412.76	413.77	413.68	413.56
45	376.73	376.94	377.52	377.98	378.24
50	337.04	339.72	333.85	340.19	340.48
55	297.19	297.94	297.94	298.40	298.70
60	250.95	252.30	252.84	253.26	252.21
65	204.72	204.93	205.31	205.69	205.81
70	157.23	156.61	156.31	157.36	158.16
75	105.63	106.64	107.31	106.89	106.39
80	60.33	64.52	61.54	68.88	65.03
85	23.41	23.91	23.58	23.54	23.07
90	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L041609202.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	202.21	N.A.	12.50
0-30	431.00	N.A.	26.70
0-40	709.26	N.A.	43.90
0-60	1265.86	N.A.	78.40
0-80	1583.6	N.A.	98.10
0-90	1613.96	N.A.	100.00
10-90	1561.76	N.A.	96.80
20-40	507.05	N.A.	31.40
20-50	798.07	N.A.	49.40
40-70	759.62	N.A.	47.10
60-80	317.74	N.A.	19.70
70-80	114.71	N.A.	7.10
80-90	30.36	N.A.	1.90
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1613.96	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	52.20
10-20	150.01
20-30	228.79
30-40	278.26
40-50	291.01
50-60	265.59
60-70	203.03
70-80	114.71
80-90	30.36
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : L041609202.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	99	96	106	102	98	94	97	94	91	93	91	88	90	88	86	83
2	99	90	83	78	96	88	82	77	85	79	75	82	77	73	78	75	71	69
3	90	79	71	64	87	78	70	64	75	68	63	72	66	61	69	64	60	58
4	82	70	61	54	80	69	60	54	66	59	53	64	57	52	62	56	52	49
5	75	62	53	47	73	61	53	46	59	52	46	57	51	45	55	49	45	43
6	70	56	47	41	68	55	47	40	53	46	40	52	45	40	50	44	39	37
7	65	51	42	36	63	50	42	36	48	41	35	47	40	35	46	40	35	33
8	60	46	38	32	58	46	37	32	44	37	32	43	36	31	42	36	31	29
9	56	43	34	29	55	42	34	29	41	33	28	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	25	24

POLAR GRAPH

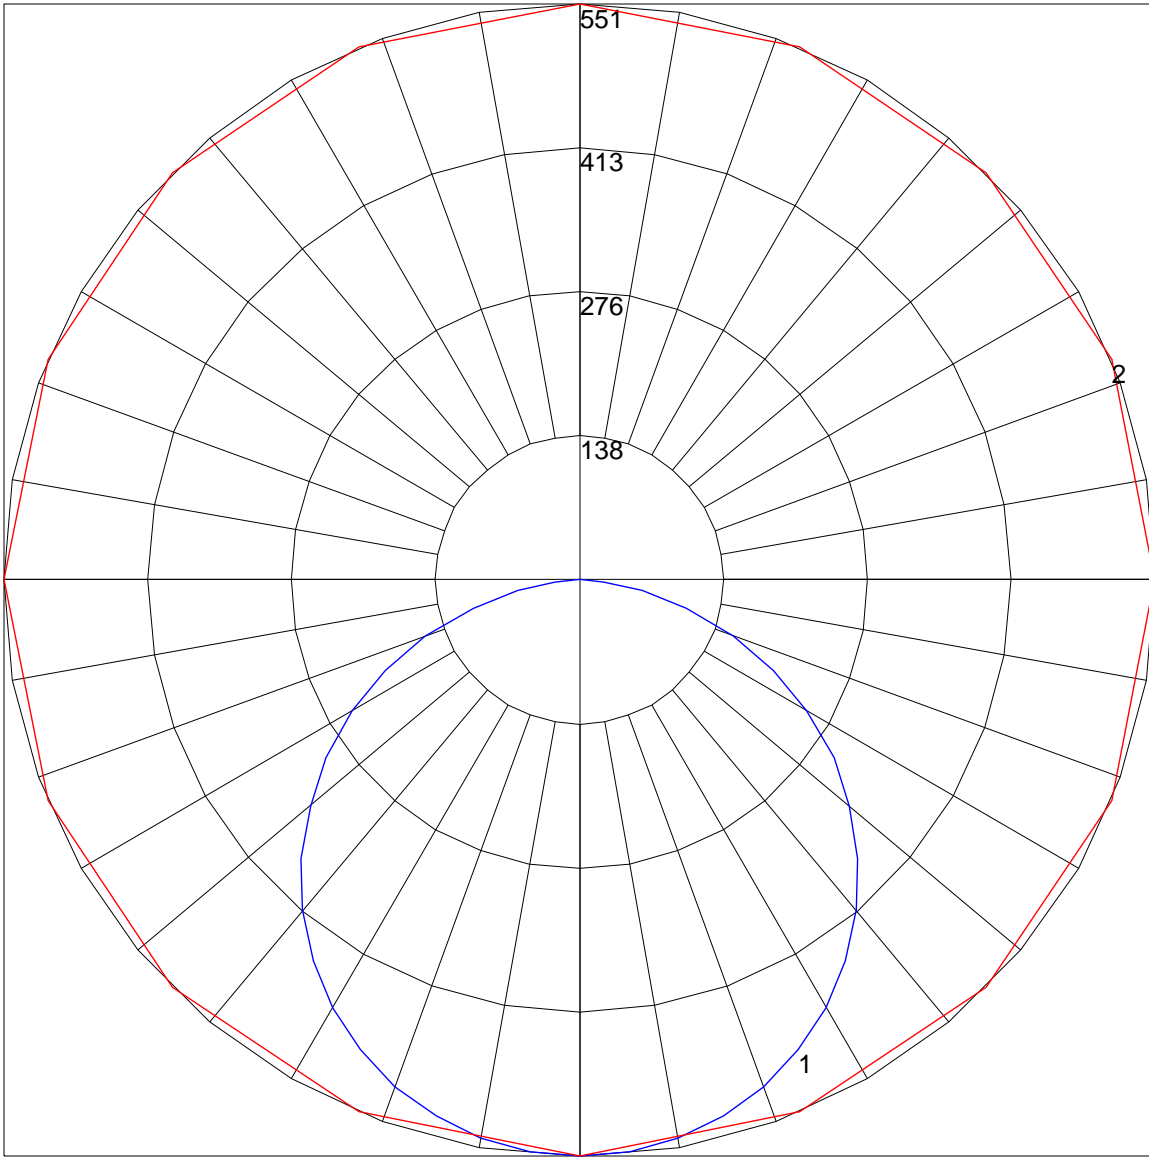

Maximum Candela = 551.33 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)