

NeoVision24 TopFlex

24VDC 3W

LED Tape Specification Sheet

PRODUCT OVERVIEW

A 24VDC high transmission, flexible linear 'neon' tape that is field cuttable and joinable. Designed for applications that require ultra-rich light and color saturation that is characteristic of neon. TopFlex enables vertical bending that conforms tape around curvilinear surfaces.

FEATURES

- 24VDC operation
- Wet location - IP65
- Multiple power feed options
- Tape encased in UV stable silicone (UV protected)
- Dimmable
- Wireless control with LUXcontrol App and controller
- 3000K or 4000K / Amber, Blue, Green or Red
- 120° viewing angle
- Maximum run: 32'-8"
- Field cuttable and joinable in 2 inch increments while retaining IP65
- Each run requires an end cap (sold separately)
- No tools required for capping and joining
- Mounting clips included (recommend use 1 per foot)

SPECIFICATIONS

ELECTRICAL

- 24VDC
- 3.0 watts per foot

OPTICS

- 90+ CRI

WARRANTY

- 5-year warranty when paired with GM power supply

CERTIFICATION

- 24VDC UL compliant
- IP65

ACCESSORIES

- LineDRIVE 24V Power Supplies
- Aluminum Channels (below)
- Connectors (below)
- Tape Cutting Tool (below)

ORDERING INFORMATION

Example: NV24T-3W-30K-16

Model	-	Watts / Foot	Color Temp.	Reel Length
NV24T		3W	3000K (30K)	16 (16'-4")
			4000K (40K)	32 (32'-8")
			Amber (AM)	
			Blue (BL)	
			Green (GR)	
			Red (RD)	

Every reel includes (1) NV24T-PF-EF (tape to power feed with 48" of lead.). 16' reel includes (16) NV24T-MC-A mounting clips and screws. 32' reel comes with (32) NV24T-MC-A mounting clips and screws. Operating temp.: -4° - 130°F.




CONNECTORS

Catalog No.	Description
NV24T-PF-EF8	Tape to power flexible end feed - 8 ft. length
NV24T-PF-BF8	Tape to power flexible bottom feed - 8 ft. length
NV24T-SP	Tape to tape splice connector
NV24T-CHL-A4	Aluminum channel - 4 ft. length
NV24T-CHL-A8	Aluminum channel - 8 ft. length
NV24T-MC-A	Aluminum mounting clips (set of 20)

GM Lighting

GM Lighting

Project Name	Type
Catalog #	Date

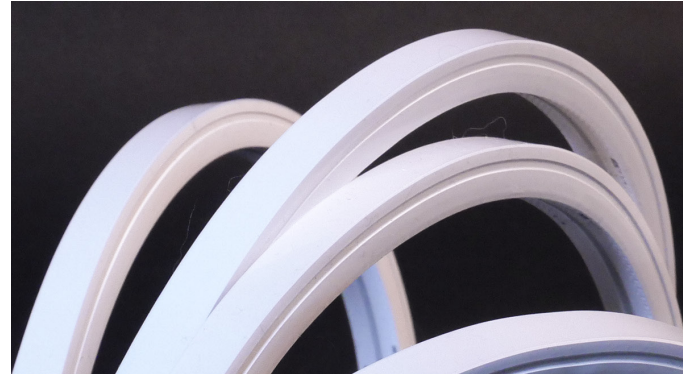

CONTROLLERS

Model	Description
SHWC	Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage, 1-Channel / 2-Wire
SHWC-RGBW-RPT	Universal Smart Power Repeater



Catalog No.	Description
NV24T-TTC6	Tape to tape 6" flexible connector
NV24T-TTC12	Tape to tape 12" flexible connector
NV24T-TTC24	Tape to tape 24" flexible connector
NV24T-FLEX-CHL	Flexible mounting channel - 39.5"
NV24-CT	Tape cutting tool
NV24T-EC	End cap

The above connectors, channels, mounting clips and caps are for the exclusive use of NeoVision24 TopFlex Neon Tape and are ordered separately. See website for accessory images.

NeoVision24 TopFlex

24VDC 3W

LED Tape Specification Sheet


GM Lighting®

Catalog No.	Length	Lumens per Foot	CRI	Color Temp.	Max. Run
NV24T-3W-30K-16	16'-4"	128	90+	3000K	32'-8"
NV24T-3W-30K-32	32'-8"	128	90+	3000K	32'-8"
NV24T-3W-40K-16	16'-4"	128	90+	4000K	32'-8"
NV24T-3W-40K-32	32'-8"	128	90+	4000K	32'-8"
NV24T-3W-AM-16	16'-4"	N/A	90+	AMBER	32'-8"
NV24T-3W-AM-32	32'-8"	N/A	90+	AMBER	32'-8"
NV24T-3W-BL-16	16'-4"	N/A	90+	BLUE	32'-8"
NV24T-3W-BL-32	32'-8"	N/A	90+	BLUE	32'-8"
NV24T-3W-GR-16	16'-4"	N/A	90+	GREEN	32'-8"
NV24T-3W-GR-32	32'-8"	N/A	90+	GREEN	32'-8"
NV24T-3W-RD-16	16'-4"	N/A	90+	RED	32'-8"
NV24T-3W-RD-32	32'-8"	N/A	90+	RED	32'-8"

Kelvin temperature (color) $\pm 100K$.

Every reel includes (1) NV24T-PF-EF (tape to power feed with 48" of lead.). 16' reel includes (16) NV24T-MC-A mounting clips and screws. 32' reel comes with (32) NV24T-MC-A mounting clips and screws. Operating temp.: -4° - 130°F.

DIMENSIONS

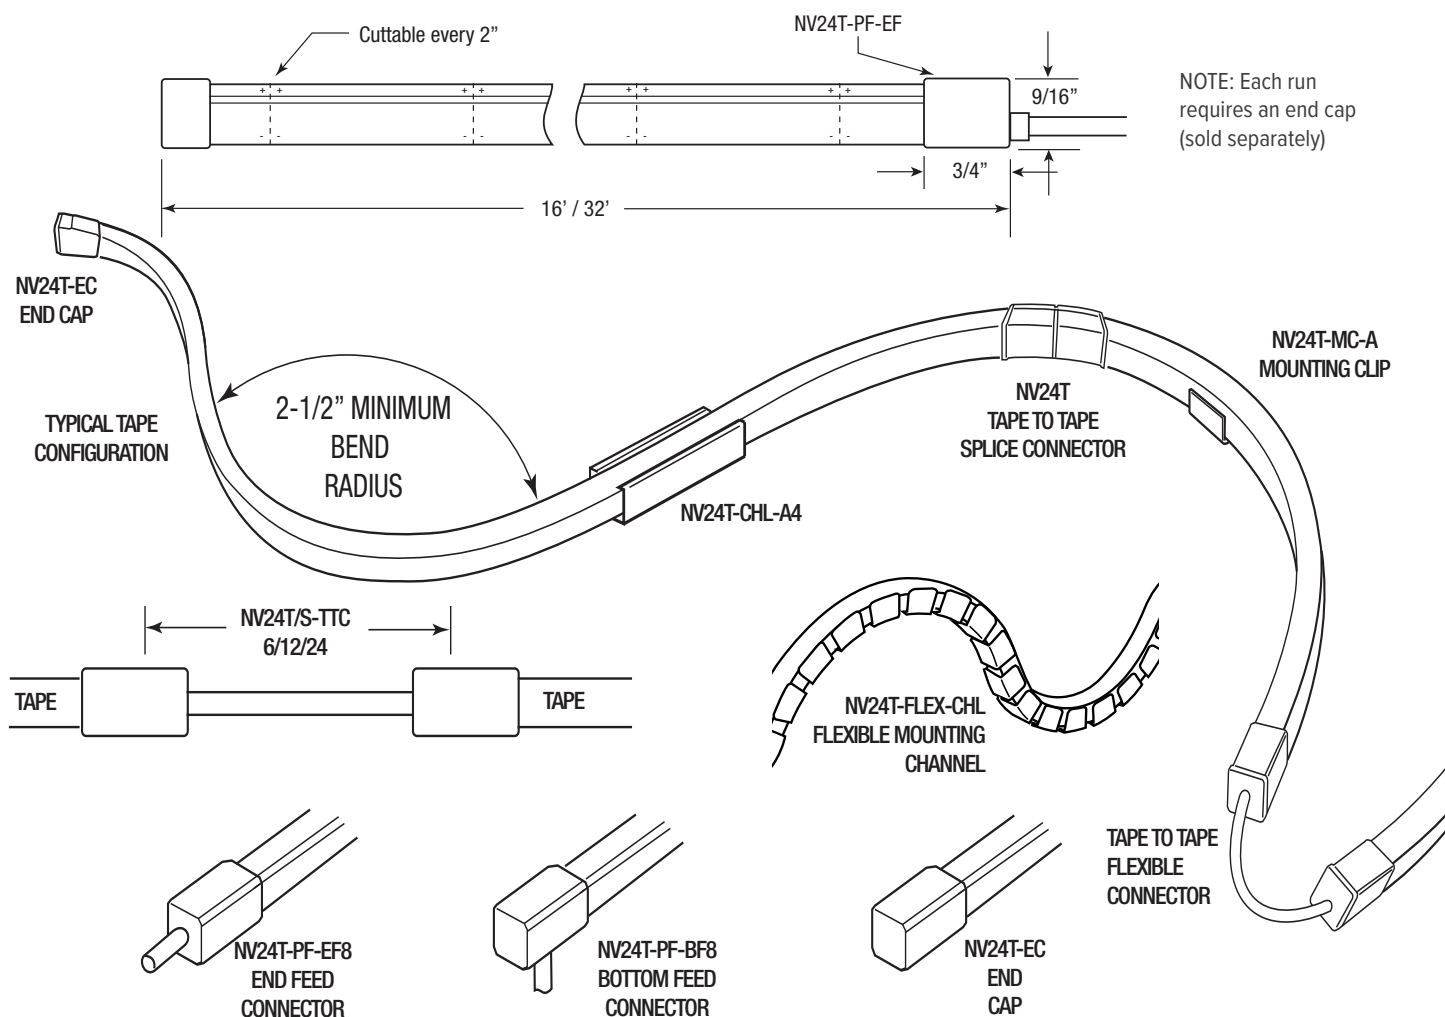

NeoVision24 TopFlex


24VDC 3W

LED Tape Specification Sheet

GMLighting®



WIRING DIAGRAM

Single color LED strip (SHWC)

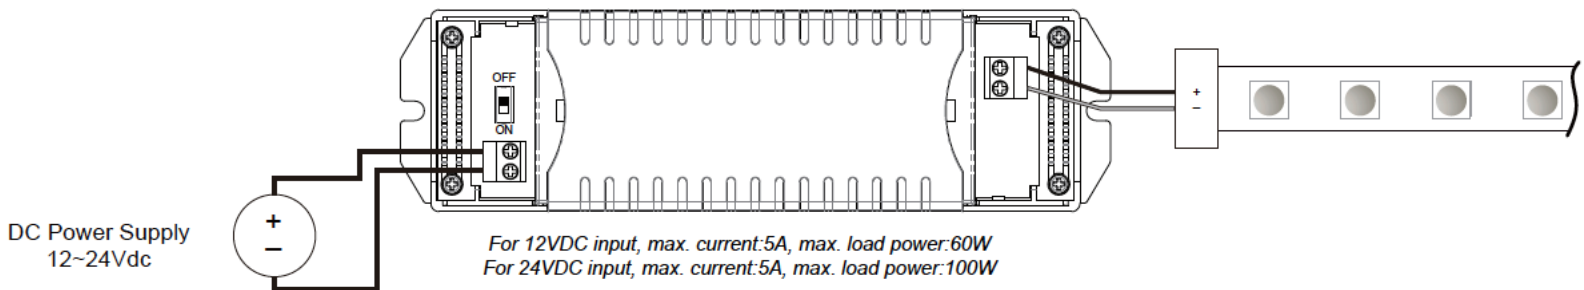

SHWC and Repeater Wiring

Single color connection (1 channel)

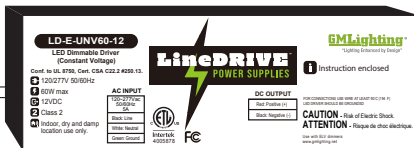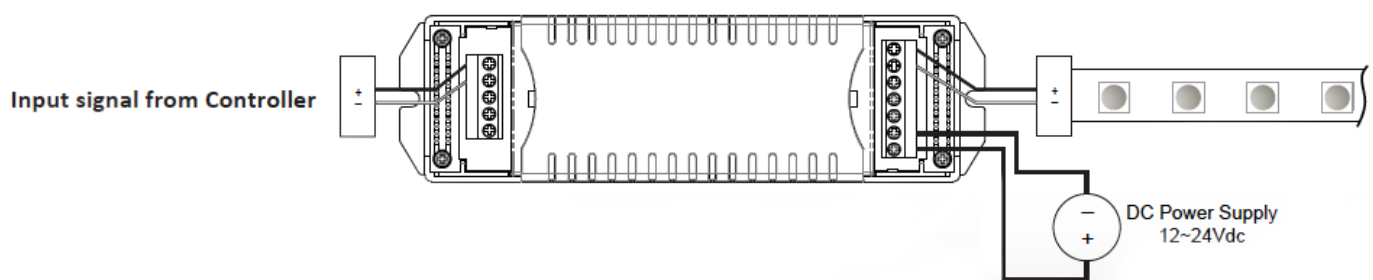

LineDRIVE™ Power Supply



LUXcontrol™ Controller




Remote WiFi Control

LUXcontrol™ App



Router Signal

NeoVision24™ LED Tape

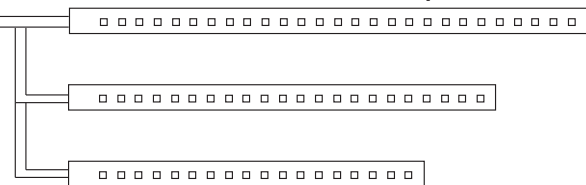

Expandable with universal power repeater (SHWC-RGBW-RPT) for larger projects

Note: For use with LD-E (non-dimmable) or LD-ED (dimmable) power supply only. Not compatible with LD-MD (magnetic) power supply.

GMLighting®

©2020 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

NVT-3W_111020 Page 3