

# GEOTASK™ 120V 90+ CRI Surface Mount Series

## WET LOCATION LED LIGHT SQUARES

**GM Lighting®**

Project Name	Type
Catalog #	Date

### PRODUCT OVERVIEW


GeoTask™ 120V 90 CRI Wet Location LED Surface Mount Light Squares are perfect for accent lighting, hospitality lighting, task lighting, light mosaics, entertainment centers kitchen, bath and vanity, residential and commercial lighting. Complies with ADA when wall mounted.

Note: GEOTASK is wet location certified for ceiling mount only - dry location certified for wall mount.



### FEATURES

- 120V
- 3000K, 4000K
- Dimmable (Triac)
- Shallow profile
- Mounts to standard J-Box
- 90+ CRI
- Wet Location (IP54 - Ceiling Mount Only)
- Edge-Lit Technology for diode-free illumination
- ADA Compliant (wall mounted)
- Title 24 / JA8
- Energy Star
- 5 year warranty

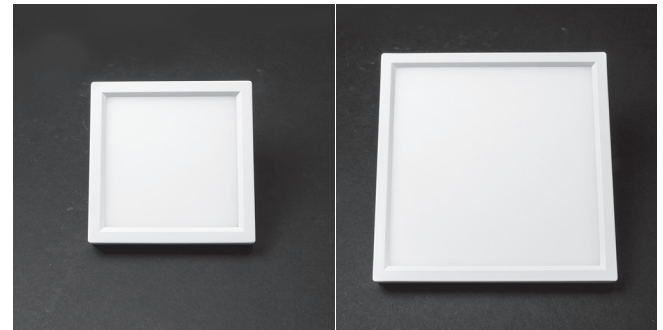

### SPECIFICATIONS

#### ELECTRICAL

- 120V (remote power supply not required)
- 10W and 15W

#### OPTICS

- 3000K/4000K
- 600 / 900 lumens
- 90+ CRI

#### LABEL

- ETL
- Energy Star

#### WARRANTY

- 5 year warranty

### Retrofit kits

Catalog No.	Description
GM-SLD4/5-RKT	Retrofit kit for 4" Square and 5" Round GeoTask
GM-SLD6/8-RKT	Retrofit kit for 6" Square and 8" Round GeoTask

### ORDERING INFORMATION

Example: GM-SLD4-40-WH


Catalog No.	Nominal Dimensions	Wattage	Lumens	CRI	Color Temp.	Finish
GM-SLD4-30-WH	4" sq. x 5/8" depth	10W	600	90+	3000K	White
GM-SLD4-40-WH	4" sq. x 5/8" depth	10W	650	90+	4000K	White
GM-SLD6-30-WH	6" sq. x 5/8" depth	15W	900	90+	3000K	White
GM-SLD6-40-WH	6" sq. x 5/8" depth	15W	950	90+	4000K	White

# GEOTASK™ 120V 90+ CRI Surface Mount Series

## WET LOCATION LED LIGHT SQUARES

**GMLighting®**

### DIMENSION

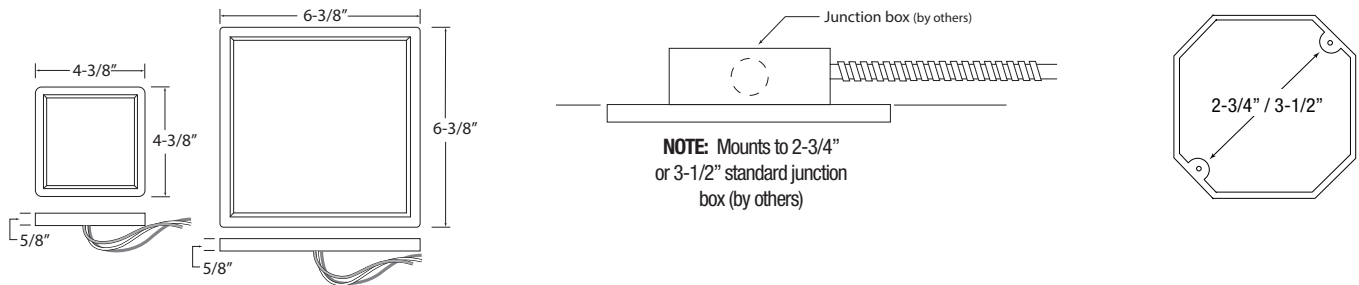

Note: Ambient operating temp range -4F to 104 F. Do not install in an environment that is outside of the product's listed ambient temp.