

MicroTask Mini

IC Rated Round and Square Recessed LED Downlight Specification Sheet

Project Name	Type
Catalog #	Date

120 VOLT

DAMP LOCATION

90+ CRI

TITLE 24-JA8

IC RATED

ETL Intertek

5 Yr. WARRANTY

PRODUCT OVERVIEW

Excellent color rendition and high lumens in a 3” mini, IC rated, damp location, round and square trim downlight that features an inline junction box connected by a modular twist connector. Perfect for any application. Available in 2700K or 3000K color temp. Die-cast construction with a white semi-gloss finish.

FEATURES

- Quick and easy installation
- Dimmable (Triac)
- 38° beam spread
- No visible glare
- Trim size:
 - Round: 3-1/8” Diam
 - Square: 3-1/8” x 3-1/8”
 - Adjustable Round: 3-3/8” Diam
- 2-1/2” recess depth
- Ceiling clearance required: 2-1/2” for Romex, 3-1/2” for MC or BX installations
- In-line junction box connected by 12” TwistLock cable
- Snap-in spring clips installation
- Suitable for damp location

SPECIFICATIONS

OPTICS

- 2700K, 3000K
- 90+ CRI
- Up to 550 lumens

ELECTRICAL

- 120V
- 8W

OPERATING TEMP

- Ambient: -4°F to 113°F

CERTIFICATION

- IC rated
- ETL
- Title 24

WARRANTY

- 5 years



MDL-3S-WH



MDL-3R-WH

ORDERING INFORMATION

Example: MDL-3AR-27-WH

Catalog No.	Trim Shape	Trim Dimensions	Wattage	Lumens	Colr Temp	CRI	Finish
MDL-3R-27-WH	Round	3-1/8” Dia. x 1-1/2” depth	8W	545	2700K	90+	White
MDL-3R-30-WH	Round	3-1/8” Dia. x 1-1/2” depth	8W	550	3000K	90+	White
MDL-3S-27-WH	Square	3-1/8” x 3-1/8” x 2-1/2” depth	8W	550	2700K	90+	White
MDL-3R-30-WH	Square	3-1/8” x 3-1/8” x 2-1/2” depth	8W	560	3000K	90+	White
MDL-3AR-27-WH	Adjustable Round	3-3/8” Dia. x 1-1/2” depth	8W	545	2700K	90+	White
MDL-3AR-30-WH	Adjustable Round	3-3/8” Dia. x 1-1/2” depth	8W	550	3000K	90+	White

MicroTask Mini


GM Lighting®

IC Rated Round and Square Recessed LED Downlight Specification Sheet

ACCESSORIES

Catalog No.	Description
MDL-5ft-EXT	5' extension cord for MDL Series downlights
MDL-10ft-EXT	10' extension cord for MDL Series downlights
MDL-20ft-EXT	20' extension cord for MDL Series downlights
UNV-NCP	Universal mounting plate for new construction

DIMENSIONS

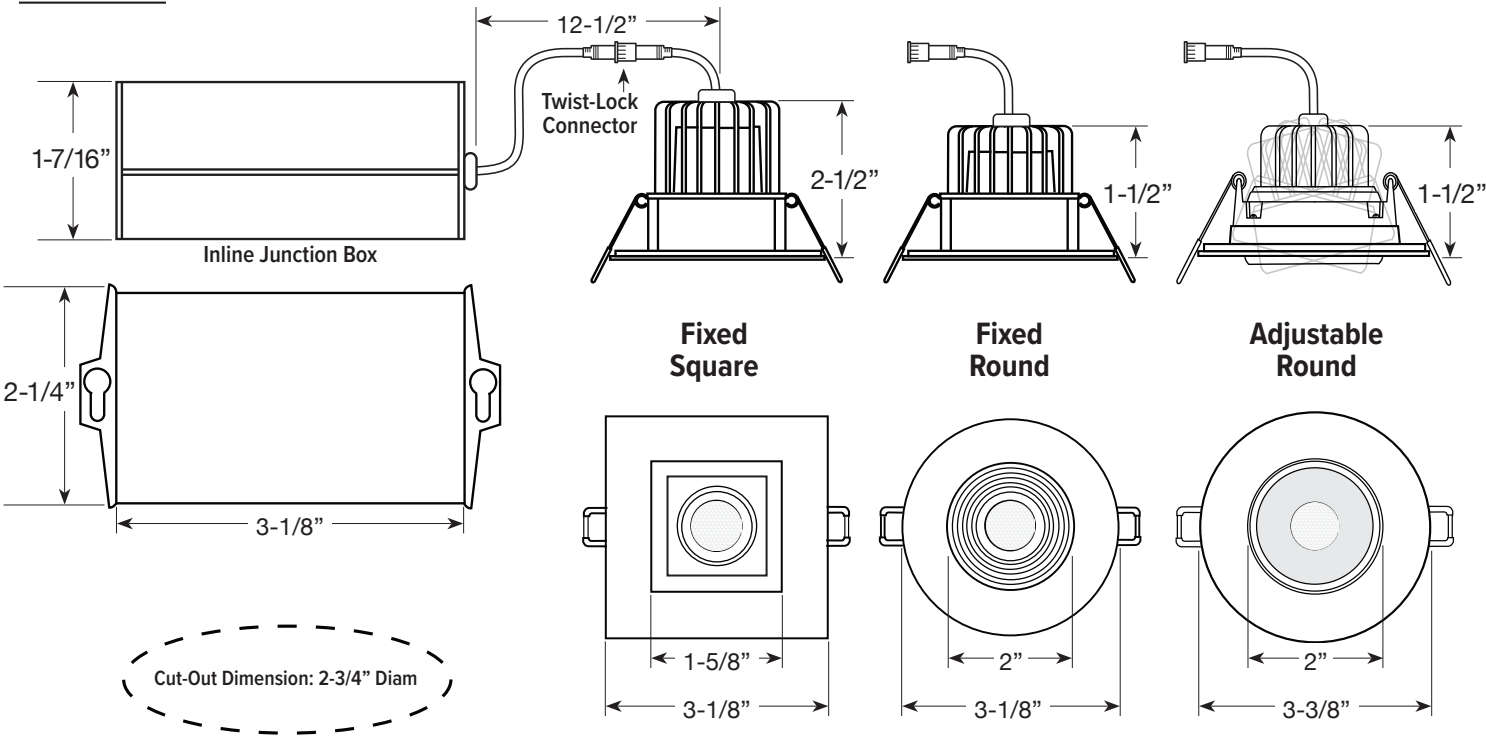

Note: Ambient operating temp range -4F to 104 F. Do not install in an environment that is outside of the product’s listed ambient temp.