

120V Wet Location Selectable Discs

PRODUCT OVERVIEW

GeoTask™ inspires a world of applications through nature's most elemental form. With the ability to switch between 2700K, 3000K and 4000K in round 5", 8" and 12" nominal diameters, GeoTask is a star in any performance venue from task to hospitality, and from residential to commercial lighting applications in a wet location luminaire.

Note: Wet location listed for showers and protected ceilings

FEATURES

- 3CCT Selectable: 2700K / 3000K / 4000K
- 120V (remote power supply not required)
- Dimmable (Triac)
- Shallow profile
- Supplied with universal mounting plate
- Wet Location (IP54 - ceiling mount only)
- ADA Compliant (wall mounted)
- Edge-Lit Technology for diode-free illumination

Note: To maintain wet listing, fixture must be sealed with caulk. Requires a standard or deep J-Box for installation. Square to round mud rings are not compatible.

SPECIFICATIONS

ELECTRICAL

- 120V
- 10W / 15W / 23W

CERTIFICATIONS

- ETL
- Title 24 / JA8

OPTICS

- 90+ CRI
- Selectable:
2700K / 3000K / 4000K

WARRANTY

- 5 years

Project Name	Type
--------------	------

Catalog #	Date
-----------	------



GM-RND12-TUN



GM-RND5-TUN



GM-RND8-TUN

ORDERING INFORMATION

EXAMPLE: GM-RND5-TUN-WH

Catalog No.	Size	-	Color Temp.	-	Finish
GM-RND	5" Diameter		TUN (Selectable 2700K, 3000K, 4000K)		WH (White)
	8" Diameter				WH (White)
	12" Diameter				WH (White)

RETROFIT KITS

Catalog No.	Description
GM-SLD4/5-RKT	Retrofit kit for 4" square and 5" round GeoTask
GM-SLD6/8-RKT	Retrofit kit for 6" square and 8" round GeoTask



GeoTask Product & Installation Video





120V Wet Location Selectable Discs

PHOTOMETRIC INFORMATION

Catalog No.	Performance	2700K	3000K	4000K
GM-RND5-TUN	CRI: 90+	595	600	635
GM-RND8-TUN		810	870	900
GM-RND12-TUN		1335	1425	1465

DIMENSIONS

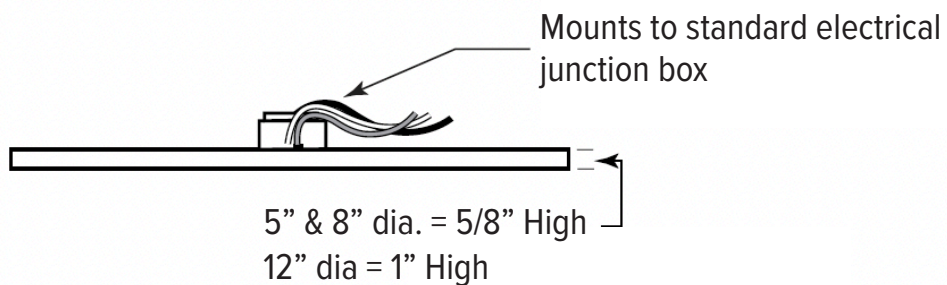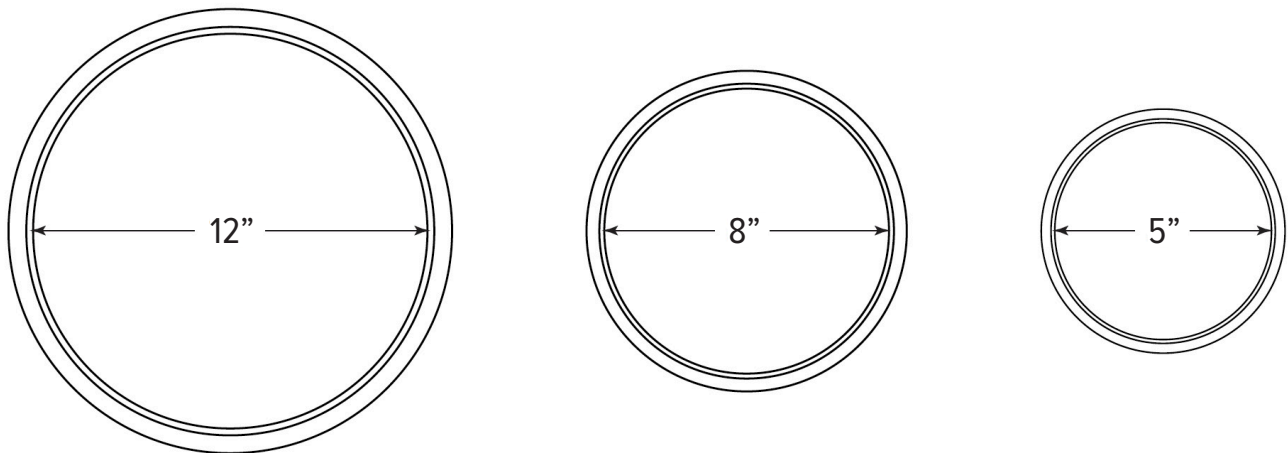

Note: Not compatible with mud in ring or pancake box.