

Surface Mount Downlight

120V R6 Series Specification Sheet 6" Low Profile Disk

GM Lighting®

PRODUCT OVERVIEW

This circular surface downlight is Title 24 certified and rated for use in closet spaces. The white powder coated steel housing with white opal lens blends in with most interior applications. Room-side selection of 3 CCT options allows the best color temperature choice for specific needs. Retrofit option for 6" downlight can.

FEATURES

- 120V operation
- 3CCT selectable switch
- Dimmable (TRIAC)
- Full foam gasketing
- Closet rated for installation within the clothes closet storage space
- Mounts to a standard J-Box or 6" recessed downlight (requires R6-RKT mounting kit).

SPECIFICATIONS

ELECTRICAL

- 120V
- 15W

CERTIFICATION

- ETL Certified
- Closet Rated: Complies with NEC code (NFPA70) 410.16, Suitable for installation within a clothes closet storage space.
- Title 24
- Energy Star
- Wet location, indoor covered ceiling
- -4 to 122 F operating temp

WARRANTY

- 3 year warranty

Project Name	Type
Catalog #	Date



APPLICATIONS

- General use
- Closets
- Pantries
- Hallways
- Bathroom
- Laundry Room

NOTE: Do not install in an environment outside the listed ambient temperature

ORDERING INFORMATION

Example: R6-TUN-WH

Model	Color Temp	Color
R6	TUN	WH (White)

PHOTOMETRIC INFORMATION

Catalog No.	Performance	Lumens Levels	3000K	4000K	5000K
		Lumens	940	1055	965
R6-TUN-WH (3CCT)	CRI: 90+ 120° beam angle	Lumen Factor	1.00	1.12	1.03

ACCESSORIES


Catalog No.	Description
R6-RKT	Retrofit kit for S6 fixture. Includes all hardware and screw-in 120V adapter.

Surface Mount Downlight

120V R6 Series Specification Sheet 6" Low Profile Disk



FIXTURE BODY

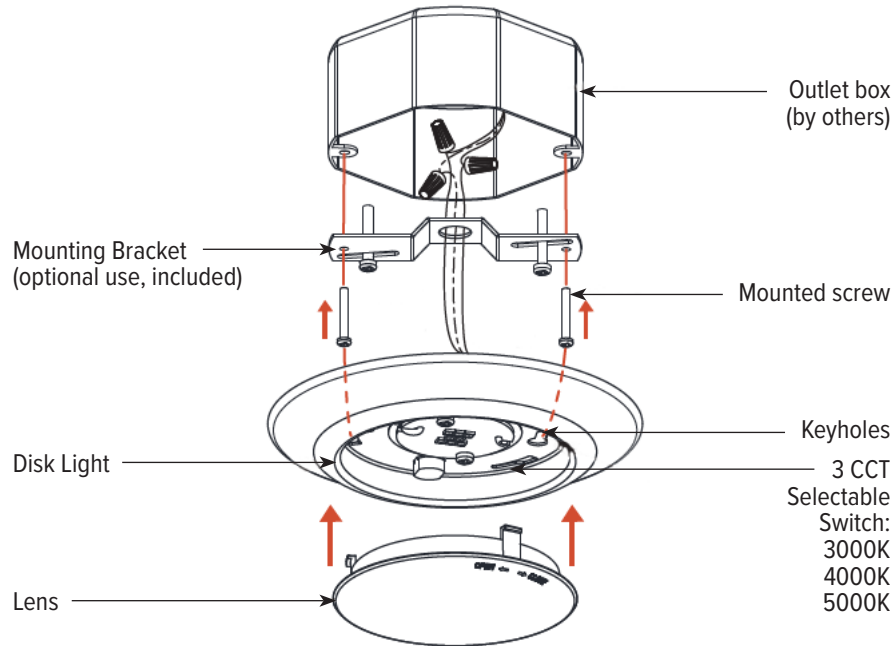

DIMENSIONS

