R6 Series

120V Surface Mount Downlight 6" Low Profile Disk Specification Sheet

PRODUCT OVERVIEW

A closet rated, wet location and Title 24 approved circular surface mount downlight that features white powder coat steel housing with white opal lens and full gasketing. Mounts to standard fixture box or with recessed R6-RKT mounting kit, ordered separately. See below.

FEATURES

- 120V operation
- Wet location
- Dimmable (TRIAC)
- · Full foam gasketing
- Closet rated: suitable for installation within the clothes closet storage space
- Mounts to a standard J-Box or 6" recessed downlight (requires R6-RKT mounting kit)
- 3-year warranty

SPECIFICATIONS

ELECTRICAL

• 120V

• 15W

OPTICS

• 90+ CRI

• 120° beam angle

• 3000K

400010

4000K

CERTIFICATION

- CSA-US
- Closet rated Conforms to NEC 410.16
- Title 24
- Energy Star

OPERATING TEMP

• -4°F to 122°F (-20°C to +50°C)

• 5000K

WARRANTY

• 3 years

DO NOT INSTALL fixture where it will operate outside of it's temperature range (-4°F - 122°F).

GMLighting®

| Project Name | Туре |
|--------------|------|
| Catalog # | Date |















ORDERING INFORMATION

| Catalog No. | Color Temp | Finish |
|-------------|------------|---------------------|
| R6 | 3000K | BN (Brushed Nickel) |
| | 4000K | WH (White) |
| | 5000K | |

ACCESSORIES

| Catalog No. | Description |
|-------------|-----------------------------|
| R6-RKT | Retrofit kit for R6 fixture |




Example: R6-3000-BN

R6 Series



120V Surface Mount Downlight 6" Low Profile Disk Specification Sheet

DIAGRAM

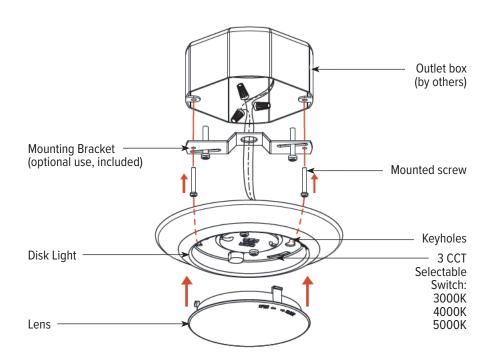

DIMENSIONS

