

R6 Series

120V Surface Mount Downlight 6” Low Profile Disk Specification Sheet



PRODUCT OVERVIEW

A closet rated, wet location and Title 24 approved circular surface mount downlight that features white powder coat steel housing with white opal lens and full gasketing. Mounts to standard fixture box or with recessed R6-RKT mounting kit, ordered separately. See below.

FEATURES

- 120V operation
- Wet location
- Dimmable (TRIAC)
- Full foam gasketing
- Closet rated: suitable for installation within the clothes closet storage space
- Mounts to a standard J-Box or 6” recessed downlight (requires R6-RKT mounting kit)
- 3-year warranty

SPECIFICATIONS

ELECTRICAL

- 120V
- 15W

OPTICS

- 90+ CRI
- 120° beam angle
- 4000K
- 3000K
- 5000K

CERTIFICATION

- CSA-US
- Closet rated - Conforms to NEC 410.16
- Title 24

OPERATING TEMP

- -4°F to 122°F (-20°C to +50°C)

WARRANTY

- 3 years

DO NOT INSTALL fixture where it will operate outside of it's temperature range (-4°F - 122°F).

Project Name	Type
Catalog #	Date



ORDERING INFORMATION

EXAMPLE: R6-3000-BN

Catalog No.	Color Temp	Finish
R6	3000K	BN (Brushed Nickel)
	4000K	WH (White)
	5000K	

ACCESSORIES


Catalog No.	Description
R6-RKT	Retrofit kit for R6 fixture

R6 Series

120V Surface Mount Downlight 6" Low Profile Disk Specification Sheet

GM Lighting®

DIAGRAM

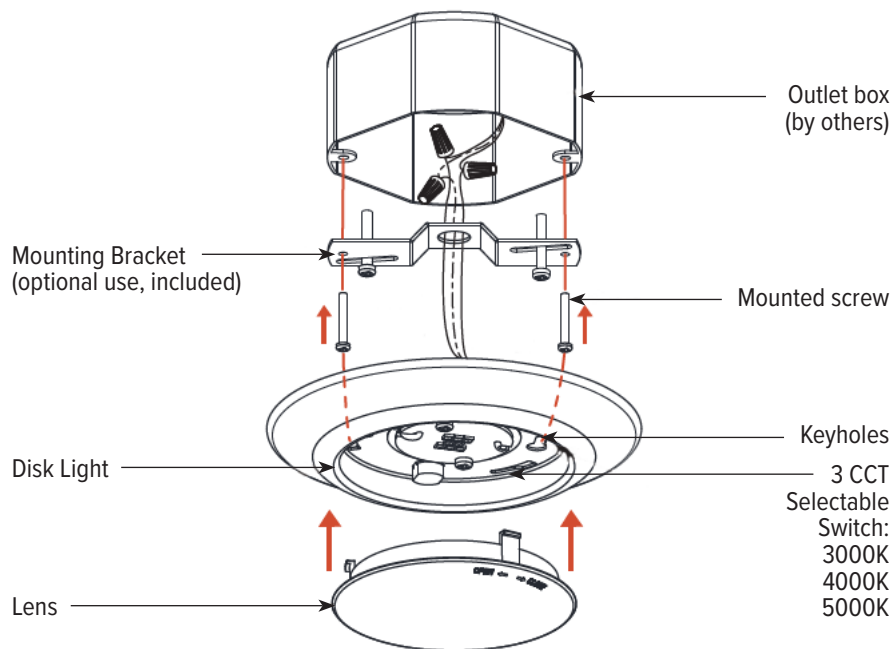

DIMENSIONS

