

Surface Mount Downlight

120V S6 Series Specification Sheet 6" Low Profile Disk

GM Lighting®

PRODUCT OVERVIEW

These circular surface mount downlights are closet rated for use throughout residential or commercial sites. Constructed of a high quality aluminum body with translucent white polycarbonate diffuser for low glare and durability. S6 luminaires are versatile and provide high quality illumination which meets Title 24/JA8 requirements.

FEATURES

- 5CCT selection switch
- Dimmable, ELV, Triac switch
- Mounts to standard 6" outlet box (requires mounting kit, S6-RKT). Also mounts to a shallow box.

SPECIFICATIONS

ELECTRICAL

- 120V (power supply not required)
- 15W

CERTIFICATION

- ETL
- ADA compliant
- Closet Rated: Complies with NEC code (NFPA70) 410.16, Suitable for installation within a clothes closet storage space.
- Title 24
- Wet location, indoor covered ceiling
- -4 to 122 F operating temp

WARRANTY

- 5 year warranty

Project Name	Type
--------------	------

Catalog #	Date
-----------	------



APPLICATIONS

- General use
- Closets
- Pantries
- Hallways
- Bathroom
- Laundry Room

NOTE: Do not install in an environment outside the listed ambient temperature

ORDERING INFORMATION

Example: S6-TUN-WH

Model	Color Temp	Color
S6	TUN	WH (White)

PHOTOMETRIC INFORMATION

Catalog No.	Performance	Lumens Levels	2700K	3000K	3500K	4000K	5000K
		Lumens	883	947	996	950	842
S6-TUN-WH (5CCT)	CRI: 90+ 120° beam angle	Lumen Factor	0.93	1.00	1.05	1.00	0.89


ACCESSORIES

Catalog No.	Description
S6-RKT	Retrofit kit for S6 fixture. Includes all hardware and screw-in 120V adapter.

Surface Mount Downlight

120V S6 Series Specification Sheet 6" Low Profile Disk

FIXTURE BODY

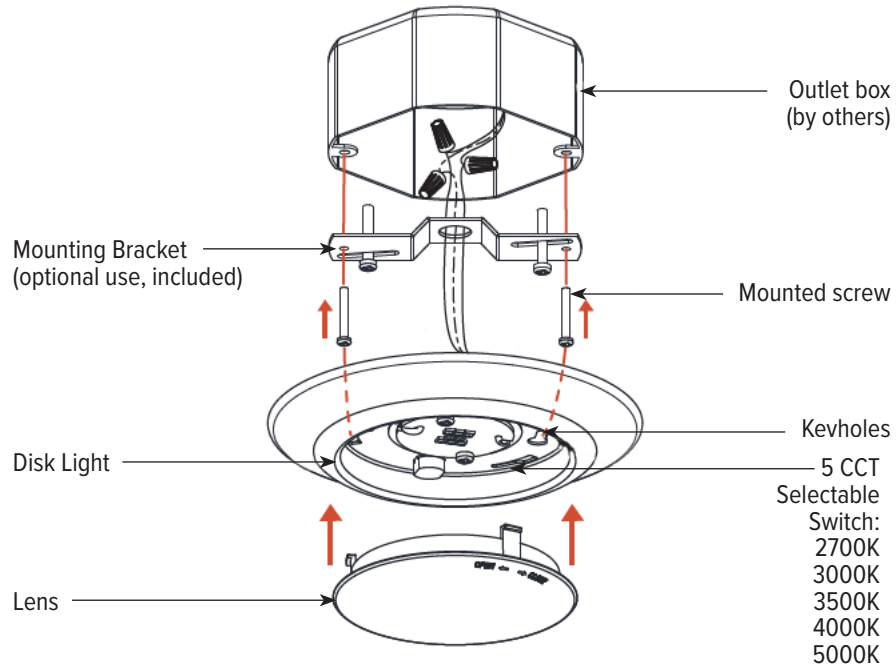

DIMENSIONS

