


# MicroTask4

5CCT 120V Mini IC Rated  
Round Gimbal Rotatable



This Gimbal downlight features a rotatable spotlight that is aimable from low to high angles for wall accent applications. Excellent color rendition with nominal 4" round trim has low glare for visual comfort. Title 24 certification and IC rating. Fixtures feature a power supply with integrated junction box. Easy snap-in installation with versatile CCT options in one unit.

Adjustable gimbal (360° rotation, 0° to 80° tilt)

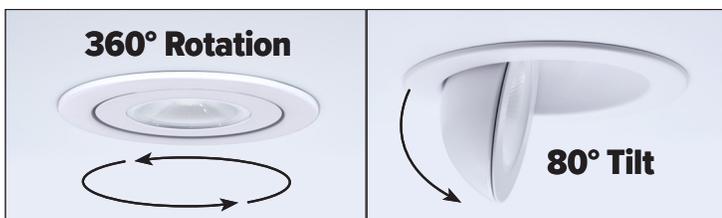

- 120V : 12W
- 5CCT selection switch
- 90+ CRI
- Indoor, damp location
- Title 24-JA8
- ETL for US and Canada
- Energy Star
- IC Rating
- Dimmable (Triac or ELV)
- LUXcontrol App compatible when installed with SHWD
- 38° beam angle
- Snap-in spring clip installation

## ORDERING INFORMATION

Example: **MDL-4GR-5CCT-BK**

<b>Model</b>	-	<b>Color Temp</b>	-	<b>Finish</b>
<b>MDL-4GR</b>		<b>5CCT:</b> 2700K / 3000K / 3500K / 4000K / 5000K		<b>BK (Black)</b> <b>WH (White)</b>

## CONNECTORS AND ACCESSORIES

Catalog No.	Description	Catalog No.	Description
<b>RSD-TUN-5FT-EXT</b>	5' extension cord for MDL tunable downlights	<b>RSD-TUN-20FT-EXT</b>	20' extension cord for MDL tunable downlights
<b>RSD-TUN-10FT-EXT</b>	10' extension cord for MDL tunable downlights	<b>UNV-NCP</b>	New construction plate for all MDL series downlights



**GM Lighting**®

©2024 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice  
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

# MicroTask4

5CCT 120V Mini IC Rated  
High Lumen Regressed



This MicroTask 4 “HL” offers a high lumen output in a very versatile mid-sized, downlight. Excellent color rendition with a smooth, 38° or 60° beam spread puts the best light into your application. Select a housing and 1 of 8 trim styles and colors to configure a winning combination. A power supply with integrated junction box simplifies installation.

- 120V
- 5CCT selection switch
- 90+ CRI / R9>50
- Wet location, indoor covered location
- Title 24-JA8
- ETL for US and Canada
- Energy Star
- IC Rating
- LUXcontrol App compatible when installed with SHWD
- 38° or 60° beam angle
- Snap-in spring clip installation
- High lumens for larger spaces



MDL-4HFL-HL-5CCT



MDL-4HWFL-HL-5CCT

## ORDERING INFORMATION

Catalog No.	Beam Spread	Dimensions	Wattage	Lumens in 3000K	Color Temp	CRI	Finish
MDL-4HFL-HL-5CCT	38°	4-1/2" dia x 5" depth	18W	1371lm	5CCT selectable: 2700K/3000K/3500K/4000K/5000K	90+	Black
MDL-4HWFL-HL-5CCT	60°	4-1/2" dia x 5" depth	18W	1329lm		90+	Black

## TRIM SELECTIONS

Catalog No.	Trim Shape/Type	Trim Dimensions
MDL-4R-TRSM-BK (Black)	MDL-4R-TRSM-WH (White)	Round Smooth
MDL-4R-TRST-BK (Black)	MDL-4R-TRST-WH (White)	Round Stepped
MDL-4S-TRSM-BK (Black)	MDL-4S-TRSM-WH (White)	Square Smooth
MDL-4S-TRST-BK (Black)	MDL-4S-TRST-WH (White)	Square Stepped



**GM Lighting**®

©2024 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice  
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net