



PRODUCT DESCRIPTION

A 120VAC damp location 4" or 6" LED square surface mount downlight with frosted lens that mounts directly to J-Box. Utilizes Edgelite technology for a clean, smooth light that is free of diode imaging or hot spots. The SQR series is perfect for all applications where modern styling and a "clean" light source is required.

PROJECT	TYPE
CATALOG NUMBER	

KEY FEATURES

- Edgelite technology enables clean, smooth and even light
- Mounts directly to J-box using adjustable keyhole slots and snap ring
- Position orientation enabled by slotted mounting ring
- Available in 4-15/16" square or 6-7/16" square
- Dimmable (see www.gmlighting.net)

ELECTRICAL

- 120VAC LED module with integrated IC chip
- SQR-4: 10W SQR-6: 15W
- Rated Life: 50,000 hrs.

OPTICS



- 3000K, 4000K
- 80+ CRI
- Up to 950 lumens

LABEL

- CSA
- Energy Star


WARRANTY

- 5 years

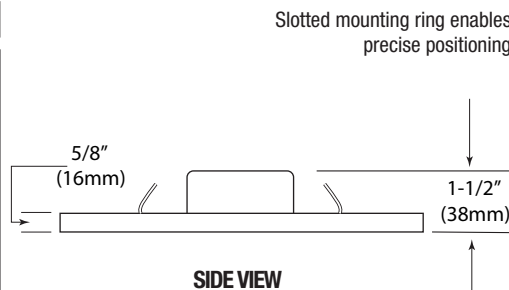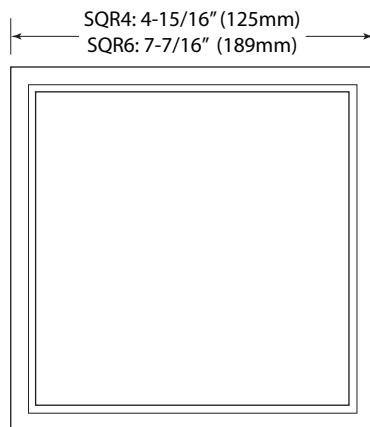

SIDE VIEW

Slotted mounting ring enables precise positioning

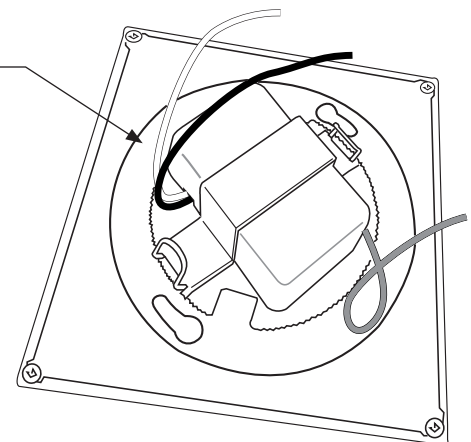

FIXTURE ORDERING INFORMATION

Catalog No.	Dimensions	Wattage	Lumens	CRI	Color Temp.*
SQR4-30	4-15/16" SQ. x 1-1/2"H	10W	575	80+	3000K
SQR4-40	4-15/16" SQ. x 1-1/2"H	10W	625	80+	4000K
SQR6-30	7-7/16" SQ. x 1-1/2"H	15W	900	80+	3000K
SQR6-40	7-7/16" SQ. x 1-1/2"H	15W	950	80+	4000K

NOTE: Mounts to standard 4" J-Box. Mounting screws not provided.

* Kelvin temperature (color) ±200K

RETROFIT KIT FOR EXISTING RECESSED CANS

Catalog No.	Description
S4-RKT	RETROFIT KIT FOR SQR4 FIXTURE (SOLD SEPARATELY)
S6-RKT	RETROFIT KIT FOR SQR6 FIXTURE (SOLD SEPARATELY)