

PROJECT	TYPE
CATALOG NUMBER	

### KEY FEATURES

- Unique design - extruded aluminum vessel
- Uniquely dense array of strategically placed LEDs
- Diodes shielded by clear polycarbonate lensing
- 3M double stick tape affixed at back
- Dimmable. For a complete list of applicable dimmers, please consult product page on website
- Connectors available (see below)
- Maximum run on a given lead is 20'

### ELECTRICAL

- 24VDC
- Rated at 6.0W per foot
- 9-7/8": 0.20A, 19-3/4": 0.40A, 39-3/8": 0.80A
- Rated life: 50,000 hrs.

### OPTICS

- 2700K, 3500K, 4200K, 5500K
- Up to 1811 lumens per bar


### CERTIFICATION

- ETL
- 5 year warranty



### PRODUCT DESCRIPTION

LARC4 24VDC Architectural LED Linear Lightbar is a 9-7/8", 19-3/4" or 39-3/8" brushed aluminum, rigid and unobtrusive (only .13/16" thick-ness) dimmable LED Lightbar that utilizes a dense array of strategically placed LEDs. LARC4 can be interconnected in series from one 24VDC power source. Only 0.20 amps per 9-7/8", 0.40 amps per 19-3/4", and 0.80 amps per 39-3/8". 50,000 hour LED life. Designed for cove lighting, commercial and architectural applications.

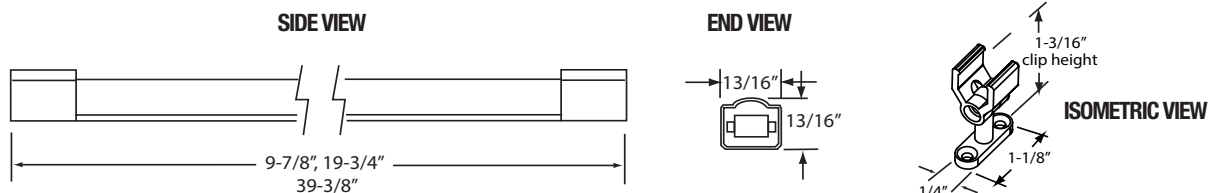

### FIXTURE ORDERING INFORMATION

Catalog No.	Length	Wattage*	Lumens	Kelvin Temp.*	CRI
LARC4-9-27-BA	9-7/8"	5W/bar	391/bar	2700K	80+
LARC4-19-27-BA	19-3/4"	10W/bar	780/bar	2700K	80+
LARC4-39-27-BA	39-3/8"	20W/bar	1575/bar	2700K	80+
LARC4-9-27-WA	9-7/8"	5W/bar	411/bar	3500K	80+
LARC4-19-27-WA	19-3/4"	10W/bar	819/bar	3500K	80+
LARC4-39-27-WA	39-3/8"	20W/bar	1654/bar	3500K	80+
LARC4-9-42-BA	9-7/8"	5W/bar	444/bar	4200K	80+
LARC4-19-42-BA	19-3/4"	10W/bar	878/bar	4200K	80+
LARC4-39-42-BA	39-3/8"	20W/bar	1772/bar	4200K	80+
LARC4-9-55-BA	9-7/8"	5W/bar	454/bar	5500K	80+
LARC4-19-55-BA	19-3/4"	10W/bar	897/bar	5500K	80+
LARC4-39-55-BA	39-3/8"	20W/bar	1811/bar	5500K	80+

Includes attached 3M double stick mounting tape, (2) mounting clips, (2) mounting screws, (1) end cap and (1) 60" lightbar to power supply connector (LARC4-PS-60)

\* Kelvin temperature (color) ±200K

### ACCESSORY ORDERING INFORMATION

Cat. No.	Description
LARC4-BB-6	6" flexible lightbar to lightbar connector
LARC4-BB-24	24" flexible lightbar to lightbar connector
LARC4-BB-36	36" flexible lightbar to lightbar connector
LARC4-BB-60	60" flexible lightbar to lightbar connector
LARC4-PS-60	60" flexible lightbar to power supply connector
LARC4-SB	2-pack swiver clip w/4 screws
GMSB-W	Splice box - white - 2"L x 1"W x 5/8"D
GMSB-B	Splice box - black - 2"L x 1"W x 5/8"D

### POWER SUPPLIES

- Please see our website at [gmlighting.net](http://gmlighting.net)

### PHOTOMETRICS

- Please see our website at [gmlighting.net](http://gmlighting.net)